
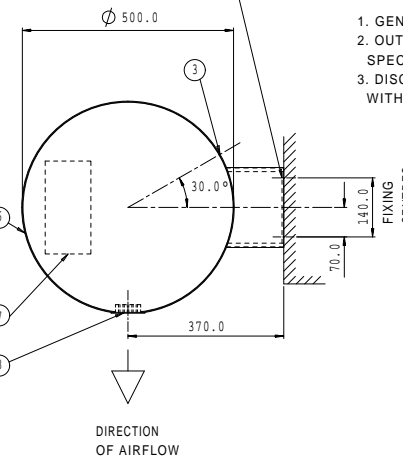
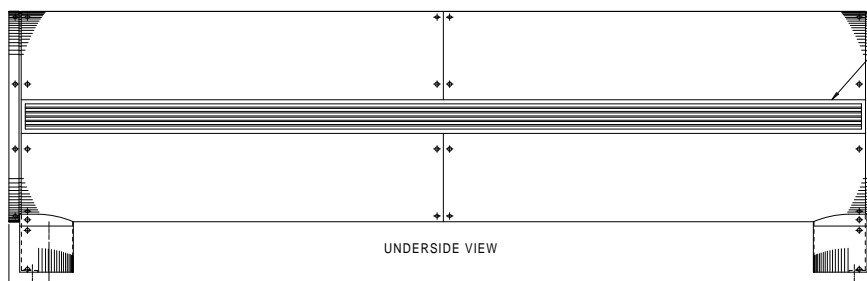
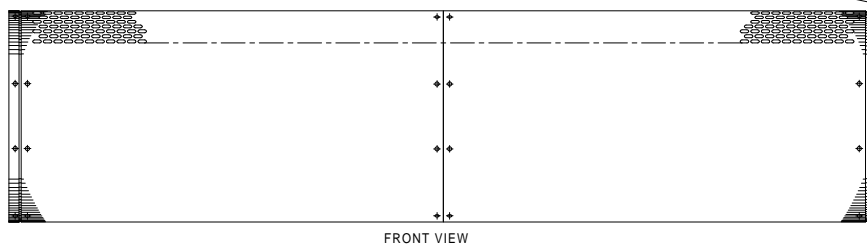
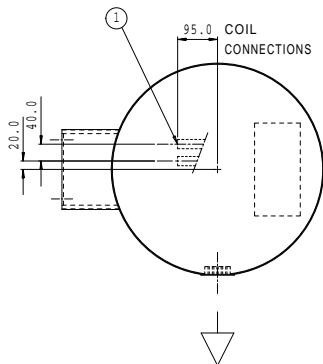


ITEM	DESCRIPTION
1	COIL CONNECTIONS ϕ 22mm OD (LPHW UNITS ONLY)
2	CABLE ENTRY (2-POSITIONS)
3	ALTERNATIVE CABLE ENTRY ϕ 25mm HOLE (2-POSITIONS)
4	PIPEWORK / CABLE SHROUD (REMOVABLE TO AID INSTALLATION)
5	FIXING HOLES ϕ 13mm (4-POSITIONS) (SUITABLE WALL FIXINGS BY OTHERS)
6	ACCESS PANEL (2-SECTIONS)
7	CONTROL BOX
8	DISCHARGE GRILLE

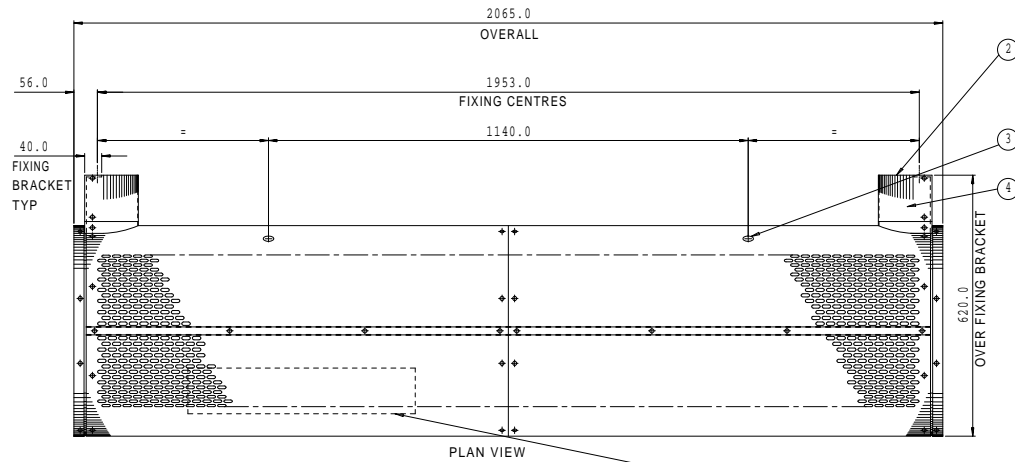

OPTION:

- LPHW UNITS: COIL TAILS CAN BE AT THE OPPOSITE END OF UNIT.

NOTES:

1. GENERAL TOLERANCE ON OVERALL DIMENSIONS: +/-4mm.
2. OUTER CASING FINISHED IN POWDERCOAT PAINT (COLOUR SPECIFIED BY THE CUSTOMER), OR BRUSHED STAINLESS STEEL.
3. DISCHARGE GRILLE PAINTED TO MATCH OUTER CASING, OR WITH A NATURAL ANODISED ALUMINIUM FINISH.

UNIT	WEIGHT
2000 LPHW	110Kg
2000 ELEC.	110Kg

The designs shown in these drawings are the original creations of Diffusion Environmental Systems which owns all the intellectual property rights therein. No reproduction may be made of the drawings nor may articles be made therefrom without prior written permission
ALL RIGHTS RESERVED
 C Dffusion 2000

REV.	MOD.NO.	DATE	DRN	CHKD	DRAWING TO B.S. 308:PARTS 1,2 AND 3.		SCALE 1:1	PRINT SCALE N.T.S.	DRAWN	MW	DIFFUSION																																									
2	LPHW WEIGHT ADDED.	12-10-10	MW		WELDING TERMS AND SYMBOLS TO B.S. 499:PART 2.						47 Central Avenue, West Molesey, Surrey, KT8 2QZ Telephone 020 8783-0033. Fax 020 8783 0140 email: diffusionheat@etenv.co.uk																																									
MODIFICATION					<table border="1"> <thead> <tr> <th colspan="4">GEOMETRIC TOLERANCE SYMBOLS</th> </tr> <tr> <th>CHARACTERISTIC</th> <th>SYM</th> <th>CHARACTERISTIC</th> <th>SYM</th> </tr> </thead> <tbody> <tr> <td>Straightness</td> <td>—</td> <td>Angularity</td> <td>∠</td> </tr> <tr> <td>Flatness</td> <td>∇</td> <td>Run out</td> <td>∕</td> </tr> <tr> <td>Roundness</td> <td>○</td> <td>Position</td> <td>⊕</td> </tr> <tr> <td>Cylindricity</td> <td>∕</td> <td>Concentricity</td> <td>⊗</td> </tr> <tr> <td>Profile of a line</td> <td>∧</td> <td>Symmetry</td> <td>≡</td> </tr> <tr> <td>Profile of a surface</td> <td>∧</td> <td>M.M.C.</td> <td>Ⓜ</td> </tr> <tr> <td>Parallelism</td> <td>∕∕</td> <td>Squareness</td> <td>⊥</td> </tr> </tbody> </table>		GEOMETRIC TOLERANCE SYMBOLS				CHARACTERISTIC	SYM	CHARACTERISTIC	SYM	Straightness	—	Angularity	∠	Flatness	∇	Run out	∕	Roundness	○	Position	⊕	Cylindricity	∕	Concentricity	⊗	Profile of a line	∧	Symmetry	≡	Profile of a surface	∧	M.M.C.	Ⓜ	Parallelism	∕∕	Squareness	⊥	ALL DIMENSIONS IN MM THIRD ANGLE PROJECTION		TOLERANCES UNLESS OTHERWISE STATED		DATE 20-12-07		CHECKED		TITLE GENERAL ARRANGEMENT - SALES CHAMELEON 2000 LPHW/ELECTRIC CIRCULAR DOOR HEATER HORIZONTAL (SIDE MOUNTED VERSION)	
GEOMETRIC TOLERANCE SYMBOLS																																																				
CHARACTERISTIC	SYM	CHARACTERISTIC	SYM																																																	
Straightness	—	Angularity	∠																																																	
Flatness	∇	Run out	∕																																																	
Roundness	○	Position	⊕																																																	
Cylindricity	∕	Concentricity	⊗																																																	
Profile of a line	∧	Symmetry	≡																																																	
Profile of a surface	∧	M.M.C.	Ⓜ																																																	
Parallelism	∕∕	Squareness	⊥																																																	
1 REQ4635 20-12-07 MW					DIMENSIONAL \pm 0,5		FINISH		DATE		JOB STANDARD OPTION																																									
					ANGULAR \pm 1°				DATE		DRG.NO. A1/22169																																									