





P5 - single

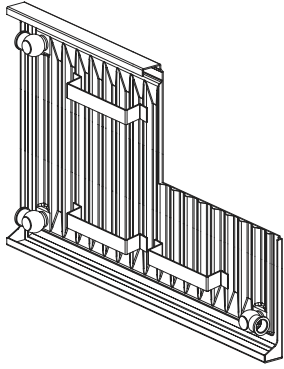


P5 without cutaway to show waterways, rear view

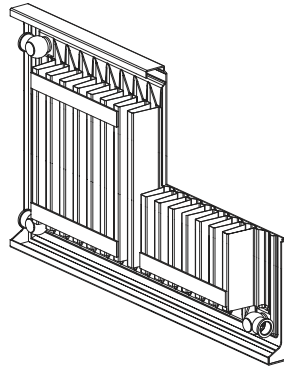


P5K with cutaway to show waterways, rear view

P5 - double

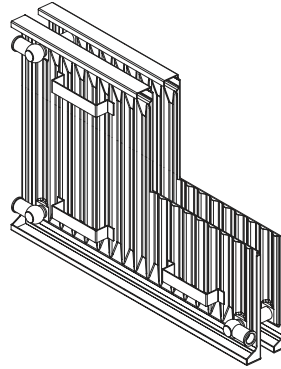


P5-D without cutaway to show waterways, rear view

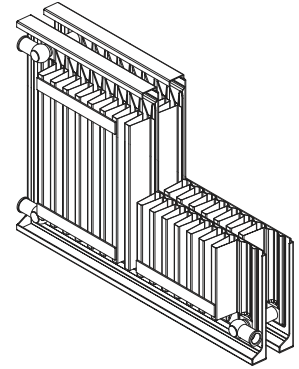


P5K-D with cutaway to show waterways, rear view

P5 - single and double

Height and length

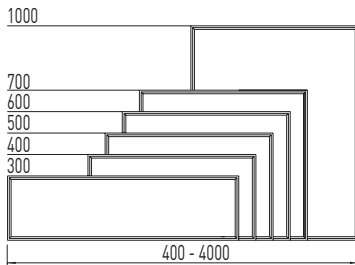


P5, profile P5K, profile P5-D, profile P5K-D, profile

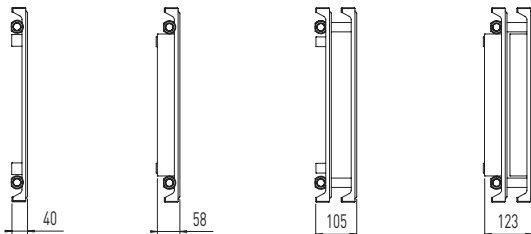


P5 - single and double with built-in valve

Built-in valve format 1



Built-in valve format 3



Built-in valve format 1:
Sensor head through front plate and 1/2" downward facing tappings

Built-in valve format 3:
Sensor head, side-facing and 1/2" downward facing tapping

Length	P5/P5K and P5-D/P5K-D: 400-4000 mm, with sections in increments of 33.33 mm Radiators above 2500 mm are with open ends
Height	P5/P5K and P5-D/P5K-D: 300, 400, 500, 600, 700 and 1000 mm
Depth	P5: 40 mm, P5K: 58 mm P5-D: 105 mm, P5K-D: 123 mm
Tappings	1/2" standard, adapter for 3/8" and 3/4"

Mounting	Wall or floor mounted Brackets are included Air vent is included
Colour	Powder coated in white RAL 9010. Gloss 70 Option: Painted in other standard RAL and BS colours
Options	- Model UR-flex - Angled - Horizon infill and end panel system - Feet

Subject to technical modifications and typographical errors – and to changes in the product range. Find the latest updates on www.hudevad.com.

P5/P5K



Output - single

P5 Height mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	317	401	0.8	9.0
400	416	526	1.0	11.6
500	514	649	1.3	14.2
600	611	772	1.5	16.8
700	707	893	1.7	19.4
1000	990	1253	2.5	26.7


P5K Height mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	413	521	0.8	11.0
400	548	692	1.0	14.6
500	681	862	1.3	18.3
600	815	1031	1.5	22.0
700	949	1202	1.7	25.6
1000	1345	1711	2.5	36.5

Output - double


P5-D Height mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	540	684	1.7	18.0
400	706	895	2.1	23.2
500	868	1100	2.5	28.4
600	1029	1304	2.9	33.6
700	1188	1506	3.4	38.7
1000	1656	2103	4.9	53.3

P5K-D Height mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	767	985	1.7	22.0
400	996	1276	2.1	29.2
500	1218	1561	2.5	36.6
600	1436	1840	2.9	44.0
700	1651	2112	3.4	51.2
1000	2280	2911	4.9	73.0


Build-in dimensions - single

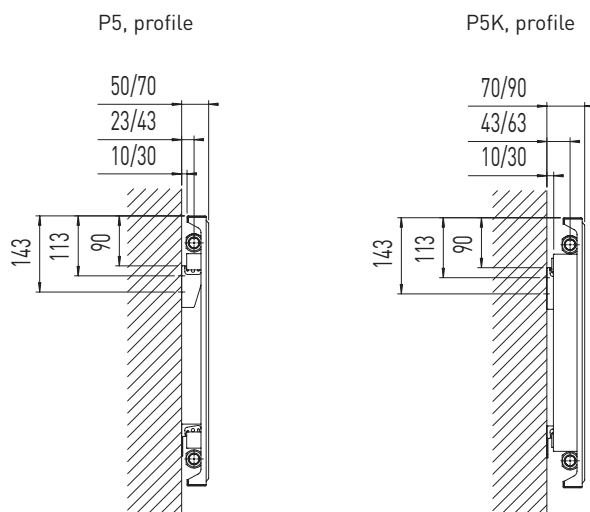

Build-in dimensions - double

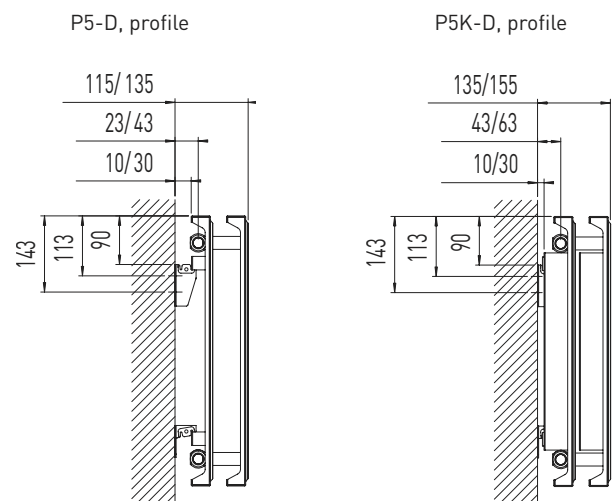


Tapping designation - single and double

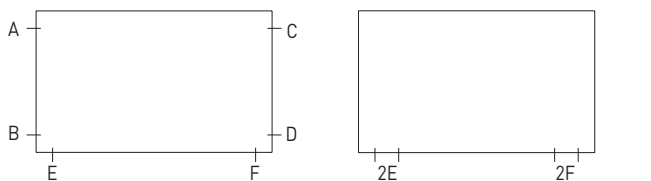

Tapping designation
Standard tappings: 1/2" ABCD

Tapping designation, 2E and 2F

Tapping designation - single and double with built-in valve

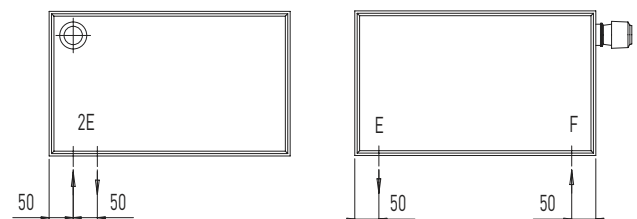

Built-in valve format 1 and 3 can be delivered as follows:

- Downward facing tappings, 2E (left) or 2F (right)
- Downward facing tappings, EF
- Other options, please contact Hudevad

Subject to technical modifications and typographical errors – and to changes in the product range. Find the latest updates on www.hudevad.com.

