

## RADIATOR DATA


|                  | Element spacing = 40 | Element spacing = 60 | Element spacing = 80 |
|------------------|----------------------|----------------------|----------------------|
| W/m 75°/65°/20°C | 1653                 | 1270                 | 1070                 |

## OUTPUT IN W/m AT A TEMPERATURE SET OF 90°/70°/20°C

| Height | Element spacing = 40 | Element spacing = 60 | Element spacing = 80 |
|--------|----------------------|----------------------|----------------------|
| 300    | 749                  | 592                  | 519                  |
| 400    | 948                  | 745                  | 646                  |
| 500    | 1143                 | 894                  | 769                  |
| 600    | 1333                 | 1039                 | 887                  |
| 700    | 1523                 | 1181                 | 1004                 |
| 800    | 1710                 | 1324                 | 1119                 |
| 900    | 1901                 | 1467                 | 1235                 |
| 1000   | 2088                 | 1610                 | 1351                 |
| 1100   | 2276                 | 1754                 | 1466                 |
| 1200   | 2467                 | 1897                 | 1582                 |
| 1300   | 2658                 | 2043                 | 1694                 |
| 1400   | 2852                 | 2183                 | 1810                 |
| 1500   | 3047                 | 2336                 | 1943                 |
| 1600   | 3233                 | 2489                 | 2060                 |
| 1700   | 3457                 | 2642                 | 2176                 |
| 1800   | 3649                 | 2795                 | 2310                 |
| 1900   | 3841                 | 2949                 | 2427                 |
| 2000   | 4066                 | 3124                 | 2561                 |
| 2100   | 4259                 | 3278                 | 2695                 |
| 2200   | 4484                 | 3432                 | 2812                 |
| 2300   | 4709                 | 3608                 | 2946                 |
| 2400   | 4934                 | 3785                 | 3081                 |
| 2500   | 5128                 | 3961                 | 3232                 |
| 2600   | 5354                 | 4138                 | 3367                 |
| 2700   | 5612                 | 4315                 | 3502                 |
| 2800   | 5839                 | 4492                 | 3654                 |
| 2900   | 6065                 | 4670                 | 3806                 |
| 3000   | 6324                 | 4869                 | 3958                 |

Outputs measured with flow at A and return at D

Subject to technical modifications and typographical errors – and to changes in the product range. Find the latest updates on [www.hudevad.com](http://www.hudevad.com).

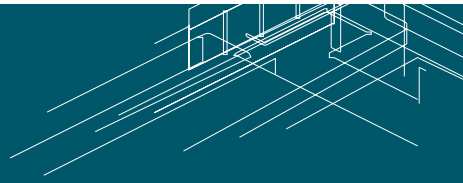

## RADIATOR DATA

|                  | Element spacing = 40 | Element spacing = 60 | Element spacing = 80 |
|------------------|----------------------|----------------------|----------------------|
| W/m 75°/65°/20°C | 2725                 | 2159                 | 1768                 |

## OUTPUT IN W/m AT A TEMPERATURE SET OF 90°/70°/20°C

| Height | Element spacing = 40 | Element spacing = 60 | Element spacing = 80 |
|--------|----------------------|----------------------|----------------------|
| 300    | 1217                 | 927                  | 768                  |
| 400    | 1553                 | 1199                 | 987                  |
| 500    | 1881                 | 1465                 | 1202                 |
| 600    | 2206                 | 1725                 | 1411                 |
| 700    | 2526                 | 1982                 | 1619                 |
| 800    | 2845                 | 2229                 | 1829                 |
| 900    | 3162                 | 2490                 | 2027                 |
| 1000   | 3464                 | 2750                 | 2242                 |
| 1100   | 3784                 | 2988                 | 2440                 |
| 1200   | 4103                 | 3249                 | 2639                 |
| 1300   | 4456                 | 3487                 | 2854                 |
| 1400   | 4776                 | 3748                 | 3053                 |
| 1500   | 5056                 | 3987                 | 3251                 |
| 1600   | 5417                 | 4248                 | 3467                 |
| 1700   | 5738                 | 4487                 | 3666                 |
| 1800   | 6092                 | 4748                 | 3882                 |
| 1900   | 6700                 | 4988                 | 4081                 |
| 2000   | 6768                 | 5249                 | 4297                 |
| 2100   | 7122                 | 5488                 | 4496                 |
| 2200   | 7444                 | 5750                 | 4713                 |
| 2300   | 7799                 | 5989                 | 4929                 |
| 2400   | 8154                 | 6251                 | 5128                 |
| 2500   | 8542                 | 6491                 | 5345                 |
| 2600   | 8898                 | 6751                 | 5562                 |
| 2700   | 9255                 | 7013                 | 5779                 |
| 2800   | 9643                 | 7253                 | 5995                 |
| 2900   | 10031                | 7515                 | 6229                 |
| 3000   | 10389                | 7777                 | 6446                 |

Outputs measured with flow at A and return at D